

**TO**

**FURNISH AND DELIVER**

**ONE (1) 1TON 4X4 PICKUP TRUCK WITH SERVICE BODY PIPE RACK AND  
LIFT GATE**

**FOR THE DEPARTMENT OF WATER SUPPLY**

**COUNTY OF MAUI**

---

**F.O.B. DWS BASEYARD AT 614 PALAPALA DRIVE IN KAHULUI, MAUI**

**FORMAL BID  
IFB# DWSP 2019-17**

## **INVITATION TO BIDDERS**

**IFB# DWSP 2019-17**

Pursuant to Chapter 103-D, HRS, sealed offers shall be received up to and publicly opened at **10:00 am on** DECEMBER 11, 2018 by the Fiscal Division, Purchasing Branch, Department of Water Supply, 5<sup>th</sup> Floor, Kalana O Maui(County Building), 200 South High Street, Wailuku, Maui, 96793, for the:

**ONE (1) 4 X 4 ONE TON PICKUP TRUCK WITH SERVICE BODY PIPE RACK AND LIFT GATE**

and publicly opened and read in the Director's Office (5th Floor) of the Department of Water Supply located in the County Building at 200 South High Street in Wailuku, Maui, Hawaii.

Specifications and Proposals may be obtained at the Office of the Purchasing Agent, Fiscal Division, located on the 5th floor of the County Building. Office hours are 7:45 a.m. to 4:30 p.m., Monday thru Friday, or visit the State of Hawaii Procurement Notice under Goods and Service. Also : [www.mauicounty.gov](http://www.mauicounty.gov), under Bids & Proposal/Good – All vehicle goods.

Bidders must be qualified in compliance with Section 103D of the Hawaii Revised Statutes.



---

MARK R. WALKER  
Director of Finance  
County of Maui

## **SPECIAL PROVISIONS**

### **IFB# DWSP 2019-17**

1. To Furnish and Deliver One (1) 4x4 One Ton Pickup Truck with Service Body Pipe Rack and Lift Gate, for the Department of Water Supply, County of Maui, shall be subject to the Minimum Specifications, Special Provisions, Proposals and General Conditions (Bid Documents) in this order of priority.
2. Bid prices shall include all costs, insurance, taxes (except Federal Excise Tax from which the County is exempt) and freight/delivery charges F.O.B. Base-yard of the Department of Water Supply at 614 Palapala Drive in Kahului, Maui.
3. Bidder must complete the appropriate proposals, enclosing current literature describing the vehicles and available options.
4. The Director reserves the right -
  - a. to accept or reject any or all bids and to waive any minor or inadvertent discrepancy in the bid documents;
  - b. to withhold award of contract for a period of thirty (30) calendar days from the date of bid opening; and,
  - c. to increase or decrease the quantities anytime prior to award of contract and vendor agrees not to claim loss of profit from the changes.
5. No withdrawal of bid will be allowed after the bids are opened.
6. Bidder shall deposit his bid with the Purchasing Agent, Department of Water Supply, 5th floor of the Kalana O Maui (County Building) in Wailuku, Maui, Hawaii.
7. Bids must be in our hands by 10:00 o'clock a.m. on the date designated for the bid opening. Bids mailed and postmarked earlier than the date and time specified for bid opening but received later will be rejected.
8. Delivery date shall be computed from the Official Commencement Date specified in the "Notice to Proceed" issued by the Director.
9. Vehicles must be delivered fully fueled and operational, to include the securing of license plates and safety inspection stickers prior to delivery to the DWS Base-yard at 614 Palapala Drive, Kahului, Maui, Hawaii.

## **SPECIAL PROVISIONS**

### **IFB# DWSP 2019-17**

10. Award of contract will be based upon the TOTAL PURCHASE PRICE.
11. Bidder must meet the requirements of Section 437, Motor Vehicle Industry Licensing Act, Hawaii Revised Statutes. A space is provided in the proposal for the License Number issued by the State of Hawaii.
12. Bidder must maintain or be able to contract for factory authorized service facilities or facilities capable of meeting factory standards as determined by the Director on the island of Maui to service and repair the vehicles offered. A letter confirming this service arrangement shall be attached to the proposal.
13. As a prerequisite for entering into a contract Bidders shall submit a current Tax Clearance, Certificate, Certificate of Good Standing, and Certificate of Compliance by using the Hawaii Compliance Express, which allows businesses to register online through a simple wizard interface at:

<http://vendors.ehawaii.gov/hce/splash/welcome.html>

Bidders registered with Hawaii Compliance Express may submit a one-page printout from the Hawaii Compliance Express website.

14. Each bidder awarded a contract is required to submit tax clearance upon final payment.
15. Liquidated Damages. The seller recognizes and agrees that time is of the essence under this agreement and, due to the speculative character and difficulty of ascertaining damages to the Department of Water resulting from any delay beyond controversy and dispute, will agree that the seller shall pay to the Department of Water the sum of TWENTY FIVE AND NO/100 DOLLARS (\$25.00) as liquidated damages and not as a penalty for each day that furnishing and delivery of the material contemplated in this agreement remains uncompleted beyond the time set herein for completion; provided, however, that the remedy of liquidated damages shall be in addition to any other rights and remedies otherwise available to the Department of Water and not expressly waived herein.

## **SPECIAL PROVISIONS**

### **IFB# DWSP 2019-17**

16. For Terms and Conditions for Goods and Service go to: [www.mauicounty.gov/department/Finance/purchasing](http://www.mauicounty.gov/department/Finance/purchasing). Look for Purchasing Terms and Conditions, Goods and Services.
17. Any questions pertaining to solicitation shall be directed to Mr. Kenneth L. Bissen, Jr., Purchasing Specialist: Telephone number is 808-270-7684 or 808-270-7301.

Any questions pertaining to technical aspect of this solicitation shall be directed to Warren Sardinha: Telephone (808) 270-7540 or Fax (808) 270-7136.

Any acceptable modifications of clarifications shall be made by issuance of an addendum, shall be given by written notice to all parties. No addendum will be made 5 days prior to the bid opening.

18. **SUBMISSION OF PROPOSAL**  
Each bid, intact and bound with the Bid Documents shall be enclosed in a sealed envelope and delivered to the Department of Water Supply, County of Maui, as indicated in the official advertisement at the address name in the advertisement. The outside of the envelope shall be plainly marked as follow:

YOUR COMPANY NAME AND ADDRESS

IFB# 2019-17

BID DOCUMENTS FOR SEALED BIDS TO FURNISH AND DELIVER ONE  
(1) 4x4 ONE TON PICKUP TRUCK WITH SERVICE BODY PIPE RACK  
AND LIFT GATE, FOR THE DEPARTMENT OF WATER SUPPLY,  
COUNTY OF MAUI.

All bids must be identified with the bidder's name, address, and appropriate licenses. Faxed offers shall be rejected.

**PROPOSAL**

**IFB# DWSP 2019-17**

Director of Water Supply  
County of Maui  
Wailuku, Maui, Hawaii

Dear Sir:

The undersigned hereby proposes to Furnish and Deliver One (1) 4x4 One Ton Pickup Truck with Service Body Pipe Rack and Lift Gate to the Department of Water Supply of the County of Maui, F.O.B. DWS Baseyard at 614 Palapala Drive in Kahului, Maui, for the amount set forth, all in strict compliance with the attached Special Provisions, Minimum Specifications, General Conditions, and the following Proposals:

\*\*\*\*\*

**ONE (1), 4X4 ONE TON PICKUP TRUCK WITH SERVICE BODY PIPE RACK AND LIFT GATE**

YEAR: \_\_\_\_\_ MAKE AND MODEL: \_\_\_\_\_

TOTAL PURCHASE PRICE . . . . . \$ \_\_\_\_\_

DELIVERY CAN BE MADE IN 180 OR LESS CALENDAR DAYS FROM "NOTICE TO PROCEED" ISSUED BY THE DIRECTOR OF WATER SUPPLY. SEE SPECIAL PROVISIONS, ITEM 15, FOR LIQUIDATED DAMAGES.

\*\*\*\*\*

**COMPANY NAME** \_\_\_\_\_

**DATE:** \_\_\_\_\_

**STATE OF HAWAII LICENSE NUMBER#** \_\_\_\_\_

**IFB# DWSP 2019-17**  
**ONE (1) 4X4, 1 TON CREW CAB PICKUP TRUCK WITH SERVICE BODY**  
**PIPE RACK AND LIFT GATE**

MODEL: New and undemonstrated, of the current year production.

TYPE: 1 Ton, 4X4 Crew Cab Pickup Truck with service box  
Lift gate pipe rack

WHEELBASE: 176" inches

GVW RATING: 10,800 GVW Max.

ENGINE: 6.2 liter 8 cylinder with electronic fuel injection  
385 HP,

COOLING SYSTEM: Heavy duty for model with transmission  
cooler and additional exterior transmission cooler  
Factory installed

ELECTRICAL SYSTEM: Dual batteries: 750 C.C.A. ea.  
Alternator: 200 AMP.

INSTRUMENTS: All gauges. (No warning lights)

STEERING: Power.

BRAKES: Power disc with Anti-lock brake system

---

SUSPENSION: Heavy duty shock absorbers for model and front  
and rear stabilizer bars.

TRANSMISSION: Automatic, with overdrive and additional factory  
installed exterior oil cooler.

TRANSFER CASE: 2 speed transfer case (HI-LO) with factory skid plate  
Package,

FRONT AXLE: 6,000 lbs. minimum capacity with manual locking  
hubs.

REAR AXLE: 7,280 lbs. minimum capacity with electric locking  
differential.

**MINIMUM SPECIFICATIONS**

**IFB# DWSP 2019-17**

**ONE (1) 4X4, 1 TON CREW CAB PICKUP TRUCK WITH SERVICE BODY  
PIPE RACK AND LIFT GATE**

GEAR RATIO:	3.73 to 1 with electric locking differential.
TIRES & WHEELS:	Five (5) only steel disc wheels, with LT275/70R18 bsw A/T On-Off road tread design spare tire and wheel to be mounted under the vehicle in carrier Mounted under the vehicle in carrier.
REAR SPRINGS:	7,000 lbs. minimum capacity with auxiliary overload Springs
BUMPER:	Front bumper - standard.
TOW HITCH:	Class v receiver hitch with safety chain attachments. A combination pintle hook/2" ball hitch rated at 16,000 lbs. Gross trailer weight, 3,000 lbs. vertical load ,mounted to a pintle hook mount with four grade 8 bolts. The pintle hook mount shall have rating equal to or greater to the combo hitch. A locking hitch pin with (2) keys shall be provided. A seven (7) way spade type electrical connector shall be provided. Mounted on top part of receiver hitch.
SEAT:	Full width standard type bench seat with vinyl material, 40/20/40 vinyl split bench seat. Rear seat vinyl bench.
FLOOR COVERING:	Color-keyed vinyl and two (2) floor mats
ACCESSORIES:	Two (2) mirrors, Manual telescoping tow mirrors Approximately 6" x 9". AM/FM Radio Factory installed air conditioning (after market air Conditioning will not be acceptable.). Reverse alarm Skid Plate package Standard jack and tire wrench. Cargo light Factory steps for cab Front tow hooks Intermittent wipers Fuel tank capacity –35 U.S gal



**MINIMUM SPECIFICATIONS**  
**IFB# DWSP 2019-17**  
**ONE(1) 4X4, 1 TON CREW CAB PICKUP TRUCK WITH SERVICE BODY**  
**PIPE RACK AND LIFT GATE**

ACCESSORIES:

Note: All other standard items of equipment listed in the manufacturer's brochure shall be included.

LIFT GATE: 1300 lbs. Lifting cap. Tommy lift Model# G2-54-1340-EA38 G2 DUAL DRIVE or equal. All metal parts shall be galvanized. Lift gate shall not protrude above service body. Platform material will be made of aluminum.

PIPE RACK.

Rack shall be bolted to body with 6 ea. stainless steel 3/8" bolts. Rack shall extend approximately 1/2 way over the truck cab.

The entire angle iron that rest on service body must be sealed so that no moisture can get between Mating surfaces of rack and service body. Center And rear cross bar need to be removable. Rack will be no higher than 4 inches from top of truck cab to bottom of truck cab.

Shall be 1 1/2 by 2 inch box tubing 1/8 thick no exceptions. Drawings of rack provided. See figure 1

SERVICE BODY: Service body to be standard silhouette, heavy duty, all steel construction.

Body height of 40 inches-maximum

Body length of 98- inches

Body width of 77.5- inches minimum \*Floor width of 48.5" minimum.

Compartment depth of 14.5' - NO EXCEPTION

Body Construction of 2-Sided A60 Galvanized steel

Doors to be double panel construction 1.25" thick with Steel hat section reinforcement between the panels.

Hat section reinforcement to be spot welded to the Iner panel and urethane bonded to the outer panel.

Nitrogen strut door holders with internal dampeners

And release clasp on vertical doors holds doors at 90 Degrees open position with adjustments to 95 degree opening.

**MINIMUM SPECIFICATIONS**

**IFB# DWSP 2019-17**

**ONE (1) 4X4, 1 TON CREW CAB PICKUP TRUCK WITH SERVICE BODY  
PIPE RACK AND LIFT GATE**

SERVICE BODY  
CONTINUE

Plated chain supports on all horizontal doors.  
Primary and secondary door seals are required.  
Primary seal is .625 wide automotive quality extruded  
Closed cell sponge seal. Secondary seal is full double  
Panel door construction having die-formed "V"  
Channels that mesh with the vertical and horizontal  
Door frame baffles to direct any water away from  
compartments.  
Polished stainless steel rotary action door latches.  
Door latches shall have a latch indicator to provide  
Visibility of unlatched compartments from the driver's  
seat.  
Automotive quality, double bitted lock cylinder with  
o-ring seal. All doors must be keyed alike.  
Door striker pin must be a 4- way adjustable zinc  
Plated shoulder bolt with ribbed allen bit head.  
Door hinges must be removable and adjustable  
Hidden type hinge. The hinge shall be constructed of  
10 gauge high strength zinc plated steel with .25"  
Stainless steel pins at pivot points.  
Piano type hinges and/ or rod type hinges are not  
Acceptable.  
The service body shall have seamless, flush type  
Wheel panels.  
Complete with all shelving and dividers in every  
cabinet.  
Shelving to be 18 gauge G60 minimum spangle  
Galvanized steel.  
All vertical shelving to be adjustable and removable  
3/16 steel tread plate floor no exceptions  
Rear lights will be led combination stop, tail, turn,  
with reverse and reflector characteristics in one  
assembly.

**MINIMUM SPECIFICATIONS**  
**IFB# DWSP 2019-17**  
**ONE (1) 4X4, 1 TON CREW CAB PICKUP TRUCK WITH SERVICE BODY**  
**PIPE RACK AND LIFT GATE**

**EMERGENCY LIGHTING**

Furnish and install 2 each WHELEN model L21LAP Super led warning lights with 2 each WHELEN Model BBKT20 brackets. Shall be installed on side of pipe rack upper front, one on each side of rack. Furnish and install 2 each WHELEN warning lights model WIONA in grille, or WIONSMA on the grill. The front ION lights shall be wired together with sync wire to flash simultaneously. Furnish and install 2 each Whelen model M4A, warning lights on rear of service body with model M4brush protectors one on each side rear facing. These lights shall be wired together sync wire to flash simultaneously. Switching shall be with single lighted switch Whelen ModelLSK mounted on bracket wired and fused.

**EXTINGUISHERS:** 2-1/2 lb. ABC dry chemical type, mounted in cab, and not in a place to interfere with the safe operation of this vehicle or comfort of the driver and passengers. Mounting bracket to be made out of steel.

**SAFETY:** Must meet all Federal, State, and County highway safety requirements.

**COLOR:** Fleet White.


**RUSTPROOFING:** Ziebart or equal treatment throughout vehicle. This includes but not limited to insides of doors, hood, engine compartment ,fenders, frame and underside chassis

**MANUALS:** Two (2) copies of the shop service CD manuals.  
Manuals  
to include trouble-shooting and repair of all sections of the vehicle, including the emission system.  
Manual must be delivered with the vehicle to fulfill Contract.

**WARRANTY:** Manufacturer's standard warranty to be listed.

MINIMUM SPECIFICATIONS  
IFB# DWSP 2019-17  
ONE (1) 4X4, 1 TON CREW CAB PICKUP TRUCK WITH SERVICE  
BODY PIPE RACK AND LIFT GATE

FIGURE1

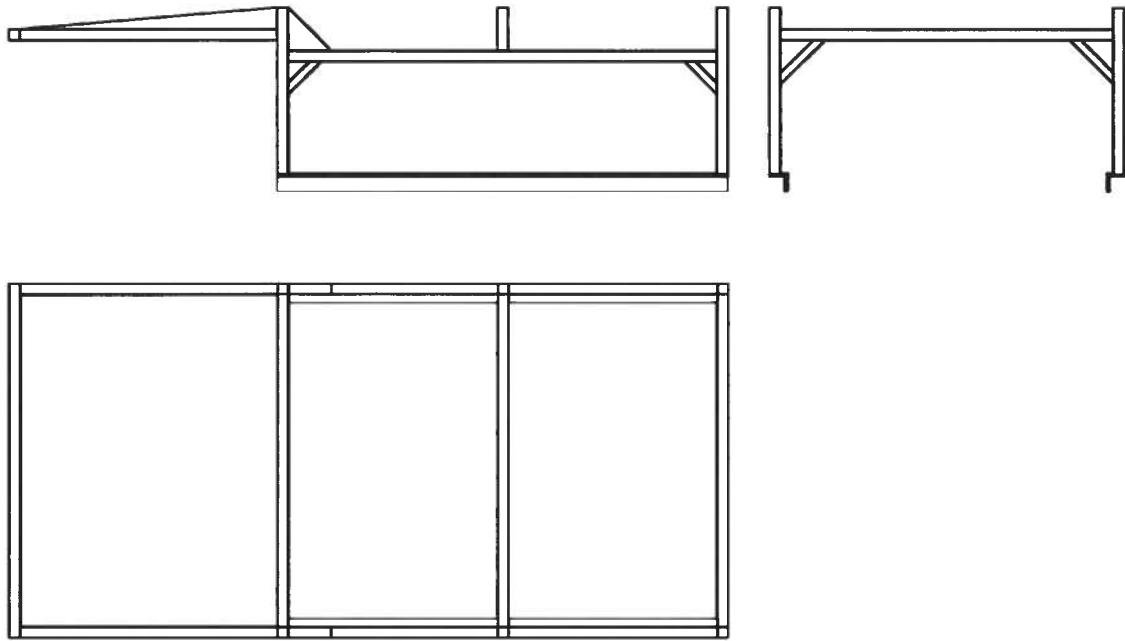

## QUESTIONNAIRE

Bidder shall complete and submit this questionnaire with their offer. FAILURE TO COMPLY WITH THIS REQUIREMENT WILL BE CAUSE FOR REJECTION OF A BID AS BEING NON-RESPONSIVE OR NON-RESPONSIBLE.

### IFB# DWSP 2019-17 ONE (1) 4X4, 1 TON CREW CAB PICKUP TRUCK WITH SERVICE BODY PIPE RACK AND LIFT GATE

Manufacturer's make and model  
no. : \_\_\_\_\_

Year of Production: \_\_\_\_\_

TYPE: \_\_\_\_\_

WHEELBASE: \_\_\_\_\_ inches

GVW RATING: \_\_\_\_\_ GVW Max.

ENGINE: \_\_\_\_\_ liters

COOLING SYSTEM: Heavy duty for model with transmission cooler and  
additional exterior transmission cooler factory installed?  
\_\_\_\_\_yes \_\_\_\_\_no

ELECTRICAL SYSTEM: DUAL: 750 C.C.A. \_\_\_\_\_yes \_\_\_\_\_no  
Alternator: 200 AMP \_\_\_\_\_yes \_\_\_\_\_no

INSTRUMENTS All gauges NO WARNING LIGHTS \_\_\_\_\_yes \_\_\_\_\_no

STEERING Power ? \_\_\_\_\_yes \_\_\_\_\_no

BRAKES: Power disk with Anti-lock brake system?  
\_\_\_\_\_yes \_\_\_\_\_no

SUSPENSION: Heavy duty shocks absorbers for model and front and rear  
stabilizer bars? \_\_\_\_\_yes \_\_\_\_\_no

TRANSMISSION Automatic with overdrive and additional factory installed  
exterior oil cooler? \_\_\_\_\_yes \_\_\_\_\_no

TRANSFER CASE: 2 speed transfer case (HI-LO) with factory skid plate  
package? \_\_\_\_\_yes \_\_\_\_\_no

QUESTIONNAIRE

**QUESTIONNAIRE**

Bidder shall complete and submit this questionnaire with their offer. **FAILURE TO COMPLY WITH THIS REQUIREMENT WILL BE CAUSE FOR REJECTION OF A BID AS BEING NON-RESPONSIVE OR NON-RESPONSIBLE.**

**IFB# DWSP 2019-17**  
**ONE (1) 4X4, 1 TON CREW CAB PICKUP TRUCK WITH SERVICE**  
**BODY PIPE RACK AND LIFT GATE**

- FRONT AXLE                      6,000 lbs. minimum capacity with manual locking hubs?  
  \_\_\_\_\_yes \_\_\_\_\_no
- REAR AXLE                      7,280 lbs. minimum capacity with electric locking  
  differential?\_\_\_\_\_yes \_\_\_\_\_no
- GEAR RATIO:                    3.73 to 1 with electric locking differential?  
  \_\_\_\_\_yes \_\_\_\_\_no
- WHEELS & TIRES:              Five (5) only steel disc wheels, with LT275/70R18 bsw  
  On-Off road tread design spare tire and wheel to be  
  Mounted under the vehicle in carrier \_\_\_\_\_yes \_\_\_\_\_no
- REAR SPRINGS:                7,000 lbs. minimum capacity with auxiliary overload  
  springs \_\_\_\_\_yes \_\_\_\_\_no
- BUMPER:                         Front bumper – standard? \_\_\_\_\_yes \_\_\_\_\_no
- TOW HITCH:                     Class v receiver hitch with safety chain attachments. A  
  combination pintle hook/2” ball hitch rated at 16,000 lbs.  
  gross trailer weight, 3,000 lbs. vertical load, mounted to a  
  pintle hook mount with four grade 8 bolts. The pintle hook  
  mount shall have rating equal to or greater to the combo  
  hitch. A locking hitch pin with (2) keys shall be provided.  
  A seven (7) way spade type electrical connector shall be  
  provided? \_\_\_\_\_yes \_\_\_\_\_no
- SEAT:                              Full width standard type bench seat with vinyl  
  material, 40/20/40 vinyl split bench seat. Rear seat vinyl  
  bench? \_\_\_\_\_yes \_\_\_\_\_no
- FLOOR COVERING:              Color-keyed vinyl and two (2) floor mats?  
  \_\_\_\_\_yes \_\_\_\_\_no

**QUESTIONNAIRE**

Bidder shall complete and submit this questionnaire with their offer. **FAILURE TO COMPLY WITH THIS REQUIREMENT WILL BE CAUSE FOR REJECTION OF A BID AS BEING NON-RESPONSIVE OR NON-RESPONSIBLE.**

**IFB# DWSP 2019-17**  
**ONE (1) 4X4, 1 TON CREW CAB PICKUP TRUCK WITH SERVICE BODY**  
**PIPE RACK AND LIFT GATE**

ACCESSORIES: Two (2) mirrors, Manual telescoping tow mirror's approximately 6" x 9". \_\_\_\_yes \_\_\_\_no  
AM/FM Radio \_\_\_\_yes \_\_\_\_no  
Factory installed air conditioning (after market air conditioning will not be acceptable.). \_\_\_\_yes \_\_\_\_no  
Reverse alarm \_\_\_\_yes \_\_\_\_no  
Skid Plate package \_\_\_\_yes \_\_\_\_no  
Standard jack and tire wrench. \_\_\_\_yes \_\_\_\_no  
Cargo light \_\_\_\_yes \_\_\_\_no  
Factory step for cab \_\_\_\_yes \_\_\_\_no  
Front tow hooks \_\_\_\_yes \_\_\_\_no  
Intermittent wipers \_\_\_\_yes \_\_\_\_no  
Fuel tank capacity – 35 U.S. gal \_\_\_\_yes \_\_\_\_no

Note: All other standard items of equipment listed in the manufacturer's brochure shall be included.

LIFT GATE: 1300 lbs. Lifting cap. Tommy lift Model# G2-54-1340-EA38 G2 DUAL DRIVE or equal.  
Lift gate shall not protrude above service body. All metal parts shall be galvanized.  
Platform material will be made of aluminum. \_\_\_\_yes \_\_\_\_no

PIPE RACK. Rack shall be bolted to body with 6 ea. stainless steel 3/8" bolts. The entire angle iron that rest on service body must be sealed so that no moisture can get between Mating surfaces of rack and service body. Center And rear cross bar need to be removable. Rack will be no higher than 4 inches from top of truck cab to bottom of truck cab. Shall be 1 ½ by 2 inch box tubing 1/8 thick no exceptions. Drawings of rack provided. See figure 1.  
\_\_\_\_yes \_\_\_\_no

## QUESTIONNAIRE

Bidder shall complete and submit this questionnaire with their offer. FAILURE TO COMPLY WITH THIS REQUIREMENT WILL BE CAUSE FOR REJECTION OF A BID AS BEING NON-RESPONSIVE OR NON-RESPONSIBLE.

### IFB# DWSP 2019-17

### ONE (1) 4X4, 1 TON CREW CAB PICKUP TRUCK WITH SERVICE BODY PIPE RACK AND LIFT GATE

#### SERVICE BODY:

Service body to be standard silhouette, heavy duty, all steel construction. \_\_\_\_yes \_\_\_\_no  
Body height of 40 inches-maximum \_\_\_\_yes \_\_\_\_no  
Body length of 98- inches \_\_\_\_yes \_\_\_\_no  
Body width of 77.5- inches minimum \*Floor width of 48.5" minimum. \_\_\_\_yes \_\_\_\_no  
Compartment depth of 14.5'- NO EXCEPTION \_\_\_\_yes \_\_\_\_no  
Body construction of 2 sided A 60 galvanized steel  
yes\_\_\_\_ no\_\_\_\_  
Door to be double panel construction 1.25" thick doors. \_\_\_\_yes \_\_\_\_no  
Steel hat section reinforcement and urethane bonded  
yes\_\_\_\_ no\_\_\_\_  
Nitrogen strut door holders and release clasp on vertical doors yes\_\_\_\_ no\_\_\_\_  
Primary and secondary door seals .625 wide and chain support yes\_\_\_\_ no\_\_\_\_  
Polished stainless steel rotary action door latches with latch indicators. Yes\_\_\_\_ no\_\_\_\_  
Automotive quality double bitted lock cylinder with o ring seal. All doors keyed alike door striker pin must be 4 way Adjustable. Zinc plated door hinges must be removable and adjustable hidden type constructed of 10 gauge high strength zinc plate with stainless steel pins at pivot points  
yes\_\_\_\_ no\_\_\_\_  
The service body shall have seamless, flush type panels.  
yes\_\_\_\_ no\_\_\_\_  
Shelving to be 18 -gauge g60 minimum spangled galvanized steel and all vertical shelving to be adjustable and removable yes\_\_\_\_ no\_\_\_\_  
Rear lights led combination stop, turn, tail, reverse and reflector in one.  
MADE IN AMERICA yes\_\_\_\_ no\_\_\_\_



**QUESTIONNAIRE**

Bidder shall complete and submit this questionnaire with their offer. **FAILURE TO COMPLY WITH THIS REQUIREMENT WILL BE CAUSE FOR REJECTION OF A BID AS BEING NON-RESPONSIVE OR NON-RESPONSIBLE.**

**IFB# DWSP 2019-17**  
**ONE (1) 4X4, 1 TON CREW CAB PICKUP TRUCK WITH SERVICE BODY**  
**PIPE RACK AND LIFT GATE**

**EMERGENCY LIGHTING**

Furnish and install 2 each WHELEN model L21LAP Super led warning lights with 2 each WHELEN Model BBKT20 brackets. Shall be installed on side of pipe rack upper front, one on each side of rack. Furnish and install 2 each WHELEN warning lights model WIONA in grill, or WIONSMA on the grill. The front ION lights shall be wired together with sync wire to flash simultaneously. Furnish and install 2 each Whelen model M4A, warning lights on rear of service body with model M4brush protectors one on each side rear facing. These lights shall be wired together sync wire to flash simultaneously. Switching shall be with single lighted switch Whelen Model LSK mounted on bracket wired and fused. \_\_\_\_yes \_\_\_\_no

**EXTINGUISHERS:**

2-1/2 lb. ABC dry chemical type, mounted in cab, and not in a place to interfere with the safe operation of this vehicle or comfort of the driver and passengers. Mounting bracket to be made out of steel.  
\_\_\_\_yes \_\_\_\_no

**SAFETY:**

Must meet all Federal, State, and County highway safety requirements. \_\_\_\_yes \_\_\_\_no

**COLOR:**

Fleet White. \_\_\_\_yes \_\_\_\_no

**RUSTPROOFING:**

Ziebart or equal treatment throughout vehicle. This includes but not limited to insides of doors, hood, engine compartment, fenders, frame and underside chassis \_\_\_\_yes \_\_\_\_no

**QUESTIONNAIRE**

Bidder shall complete and submit this questionnaire with their offer. **FAILURE TO COMPLY WITH THIS REQUIREMENT WILL BE CAUSE FOR REJECTION OF A BID AS BEING NON-RESPONSIVE OR NON-RESPONSIBLE.**

**IFB# DWSP 2019-17**  
**ONE (1) 4X4, 1 TON CREW CAB PICKUP TRUCK WITH SERVICE BODY**  
**PIPE RACK AND LIFT GATE**

MANUALS: Two (2) copies of the shop service CD manuals. Manuals to include trouble-shooting and repair of all sections of the vehicle, including the emission system. Manual must be delivered with the vehicle to fulfill Contract.  
\_\_\_\_\_yes \_\_\_\_\_no

WARRANTY: Manufacturer's standard warranty to be listed:  
Specify:  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

Name & address of local service and repair shop:  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

AUTHORIZED REPRESENTATIVE

\_\_\_\_\_  
NAME OF FIRM

\_\_\_\_\_  
SIGNATURE OF BIDDER\*\*

\_\_\_\_\_  
ADDRESS OF FIRM

\_\_\_\_\_  
PRINT OR TYPE NAME OF BIDDER

\_\_\_\_\_  
TELEPHONE NUMBER

\_\_\_\_\_  
PRINT OR TYPE TITLE OF BIDDER

\_\_\_\_\_  
DATE SIGNED

\_\_\_\_\_  
FEDERAL ID/SOCIAL SECURITY #

HAWAII STATE GENERAL EXCISE TAX LICENSE NUMBER \_\_\_\_\_

PLEASE SPECIFY TYPE OF ORGANIZATION:

INDIVIDUAL \_\_\_\_\_ PARTNERSHIP \_\_\_\_\_ CORPORATION \_\_\_\_\_ LIMITED LIABILITY CORP. \_\_\_\_\_

STATE OF INCORPORATION: HAWAII \_\_\_\_\_ OTHER: \_\_\_\_\_ SPECIFY \_\_\_\_\_

\*\* If Corporation, please attach to this page your corporate seal; also evidence of the authority of this officer to submit a bid on behalf of the corporation. Such authority must be in the form of a corporate resolution. Give also the names and addresses of the officers of the Corporation.

(SEAL)